




TRIAL PIT RECORD		CLIENT BROWNE SMITH BAKER	SCALE 1 to 50	JOB NO C9927	TRIAL PIT NO TP3
DUNELM DRILLING CO 0191 626 2634 FAX 0191 617 0086		DATE 7/1/99	LOCATION EAST CRESCENT, DUCKMANTON		
Datum	A	B	C	D	Depth
0.00					0.00
1					0.50
2					1.00
					1.50
3					2.00
					2.50
					3.00
					3.50
					4.00
STRATA				SAMPLES & TESTS	
Reference	Description	Depth	Type/No	Shear Strength or N-value	
1	MADE GROUND—Grass on a soil & clay fill with some fragmented brick concrete and waste building material present.	0.25 0.85 0.90	B 1 V B 2	12.4	
2	Firm light reddish brown & gray mottled friable sandy CLAY (Glacial Till) with some fine gravel present. Grading into a dark brown firm to stiff sandy silty clay below 1.00m.				
3	Weathered weak to moderately weak thinly bedded light brown/orange/gray fine to medium grained SANDSTONE with some clay filled fissures.				
Plant		MECHANICAL EXCAVATOR (JCB)		Dimensions	
Shoring		NONE		A= 3.00	
Stability		STABLE		B= 0.60	
Ground Water		Slight ingress ♦ base of pit. No standing level recorded.		D	
Remarks		C			

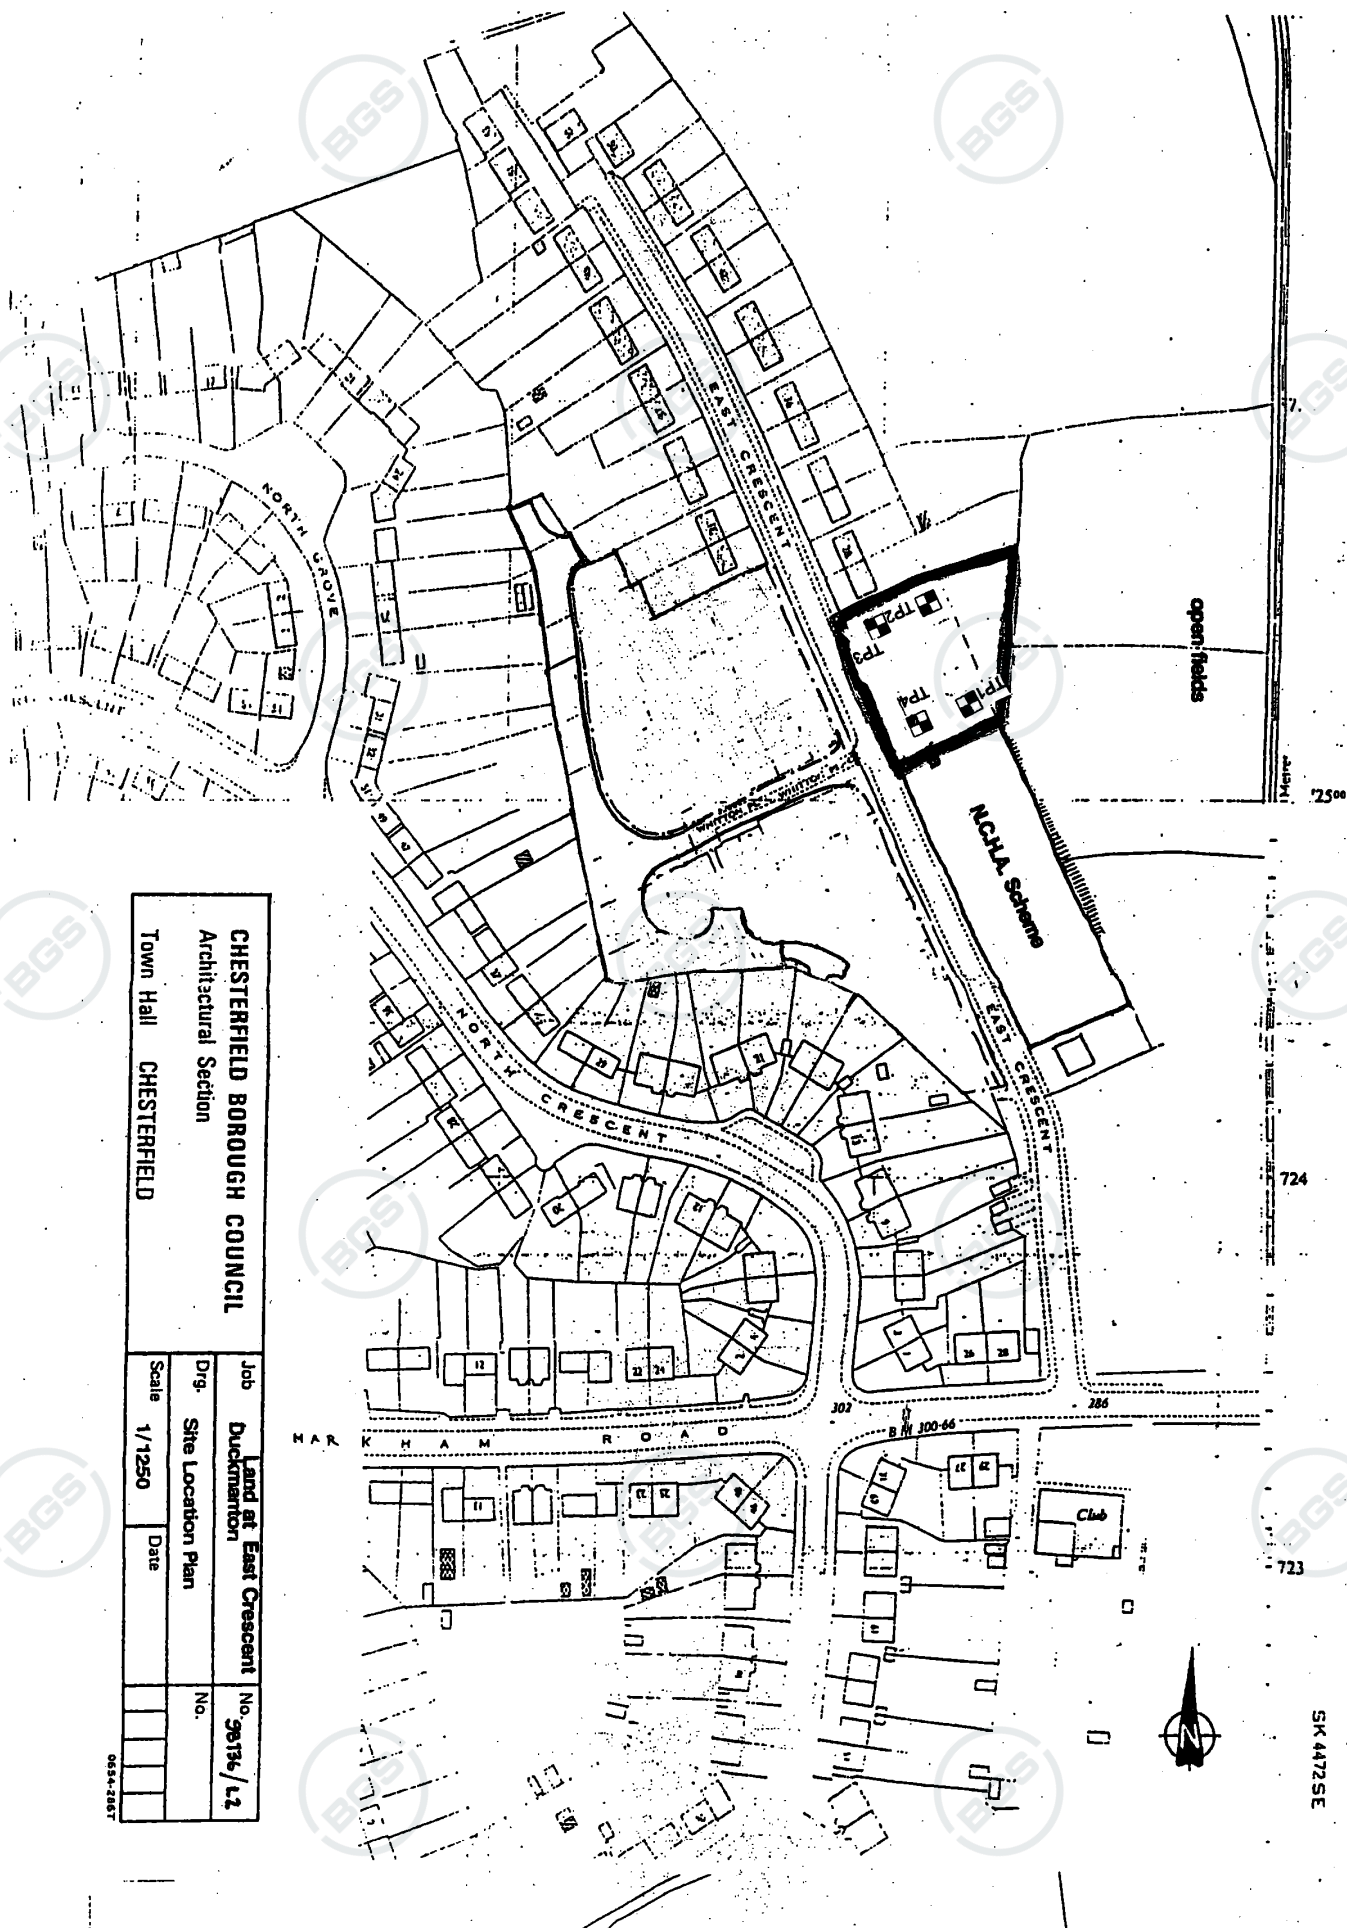

CHESTERFIELD BOROUGH COUNCIL			
Architectural Section			
Town Hall CHESTERFIELD			
Job	Land at East Crescent	No.	36134/L2
Dwg.	Duckmanton	No.	
Site Location Plan			
Scale	1/1250	Date	

0854-2887