




TRIAL PIT RECORD		CLIENT BROWNE SMITH BAKER	SCALE 1 to 50	JOB NO C9927	TRIAL PIT NO TP2
DUNELM DRILLING CO 0191 626 2634 FAX 0191 517 0085		DATE 7/1/99	LOCATION EAST CRESCENT, DUCKMANTON		
Datum	A	B	C	D	Depth
0.00					0.00
1					0.50
2					1.00
3					1.50
					2.00
					2.50
					3.00
					3.50
					4.00
STRATA					SAMPLES & TESTS
Reference	Description	Depth	Type/No	Shear Strength or N-value	
1	TOPSOIL	0.75	B 1		
2	Firm light reddish brown & gray mottled friable sandy CLAY (Glacial Till) with some fine gravel present. Grading into a dark brown firm to stiff sandy silty clay below 0.65m.	0.75	V	86.3	
		1.50	B 2		
3	Weathered weak to moderately weak thinly bedded light brown/orange/gray fine to medium grained SANDSTONE with occasional clay filled fissures.				
Plant	MECHANICAL EXCAVATOR (JCB)	Dimensions		Location Sketch Plan (NTS)	
Shoring	NONE	A= 3.00			
Stability	STABLE	B= 0.60			
Ground Water	Trial pit dry.	C			
Remarks					

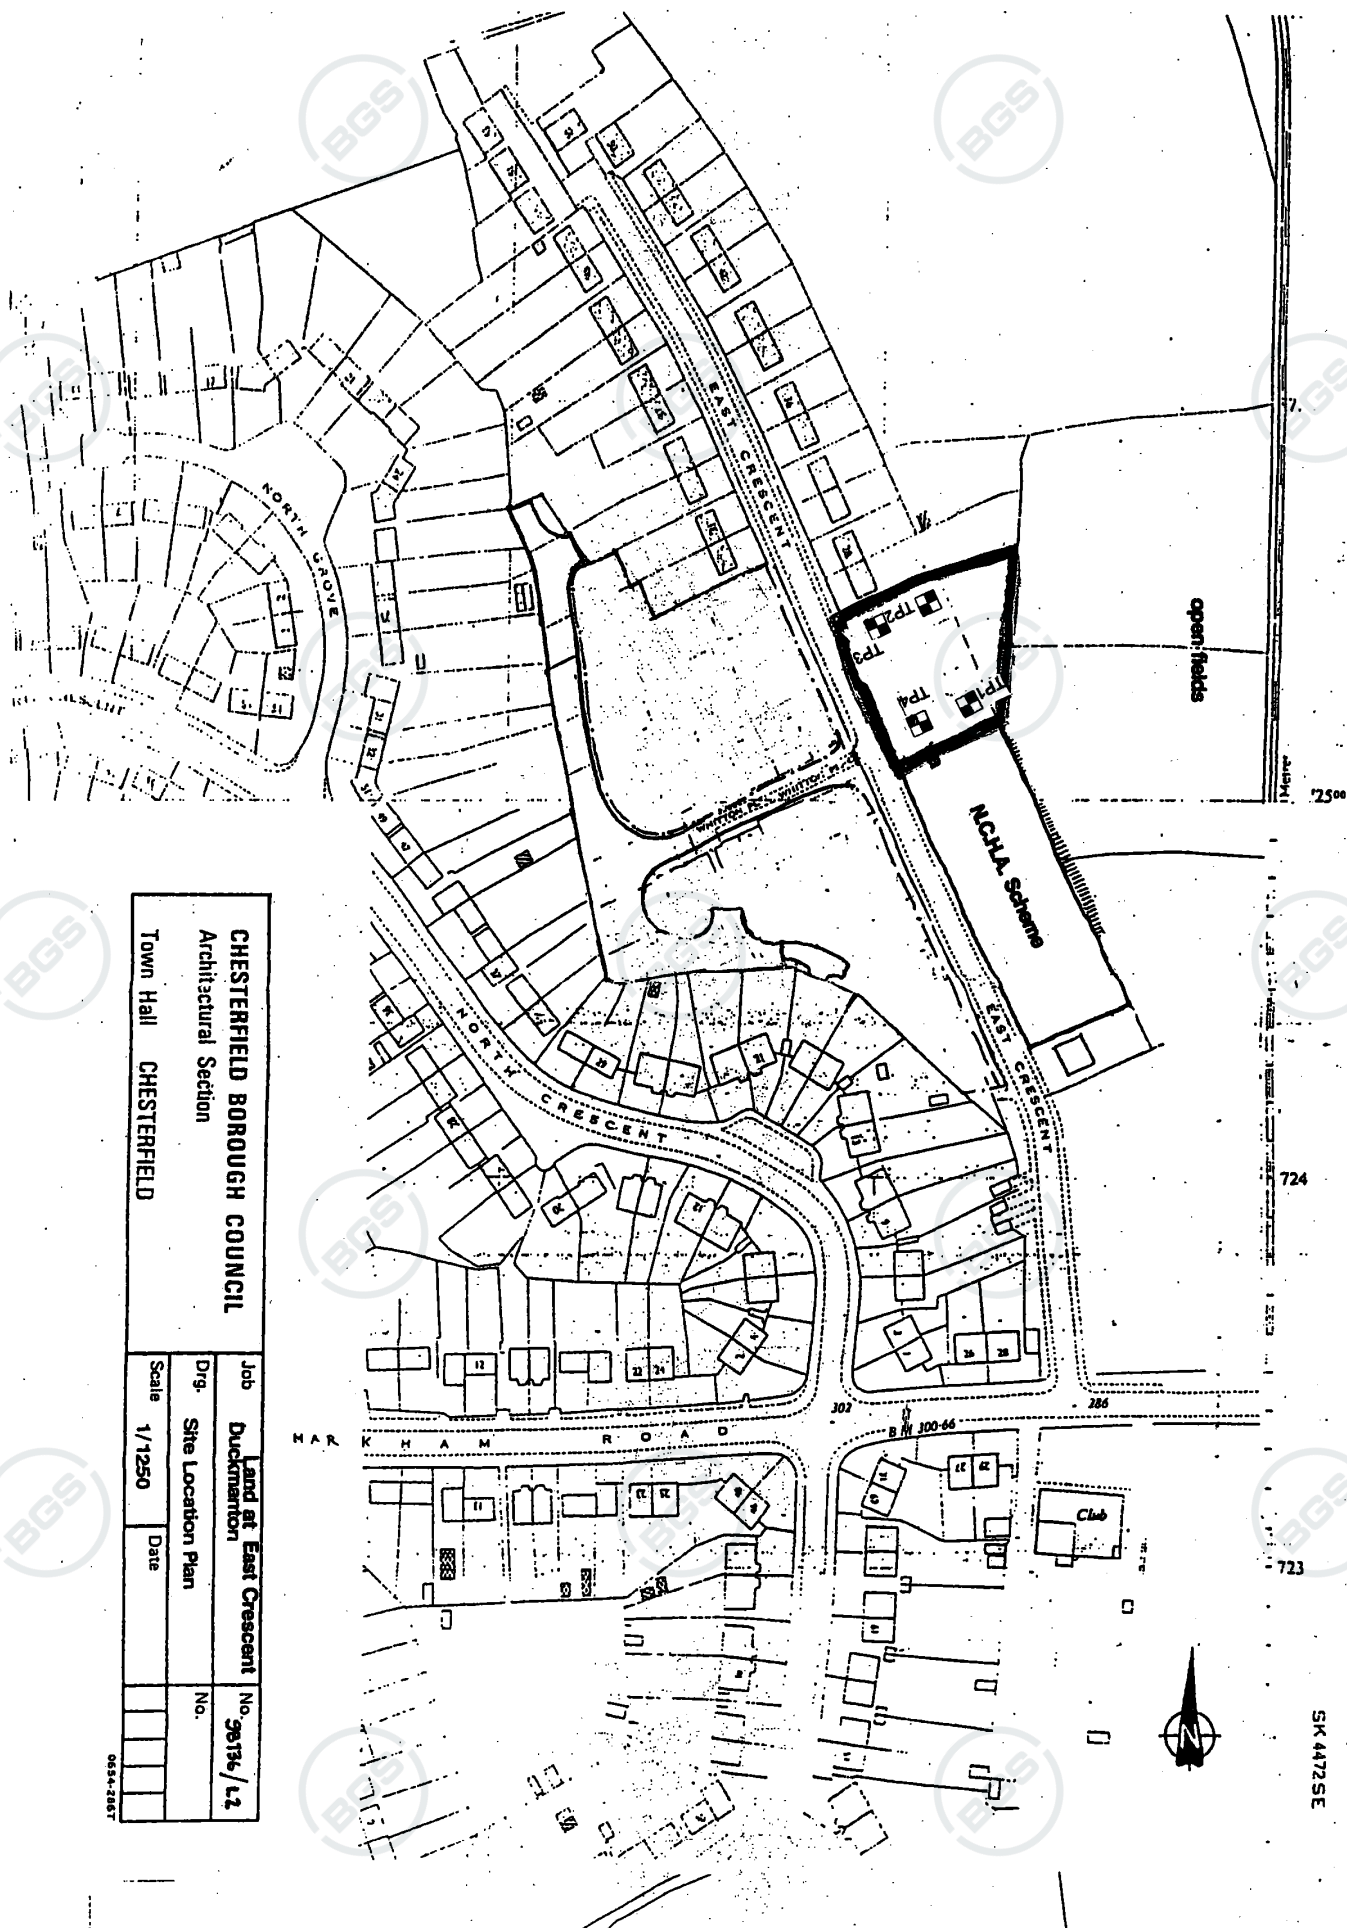

CHESTERFIELD BOROUGH COUNCIL			
Architectural Section			
Town Hall CHESTERFIELD			
Job	Land at East Crescent	No.	36134/L2
Dwg.	Duckmanton	No.	
Site Location Plan			
Scale	1/1250	Date	

0854-2887